


(19)  **Europäisches Patentamt**  
**European Patent Office**  
**Office européen des brevets**



(11) **EP 0 959 462 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
24.11.1999 Bulletin 1999/47

(51) Int. Cl.<sup>6</sup>: **G11B 7/00**, G11B 7/24,  
G11B 7/26

(21) Application number: 99109224.8

(22) Date of filing: 21.05.1999

*de Navigation*

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: 22.05.1998 JP 14072398

(71) Applicant:  
**PIONEER ELECTRONIC CORPORATION**  
Meguro-ku, Tokyo (JP)


(72) Inventors:  
• Katsuyoshi, Hayashi,  
Pioneer Electronic Corp  
Kawagoe-shi, Saitama (JP)  
• Kenichiro, Yano,  
Pioneer Electronic Corp  
Kawagoe-shi, Saitama (JP)

(74) Representative:  
Klingseisen, Franz, Dipl.-Ing. et al  
Patentanwlte,  
Dr. F. Zumstein,  
Dipl.-Ing. F. Klingseisen,  
Postfach 10 15 61  
80089 Mnchen (DE)

(54) **Recording medium on which navigation information is recorded and information reproducing apparatus therefor**

(57) A recording medium and an information reproducing apparatus capable of quickly reading navigation information are offered. The recording medium has a plurality of recording layers, on each of which navigation

information is recorded. Navigation information having a same attribute is recorded in same one of the plurality of recording layers.

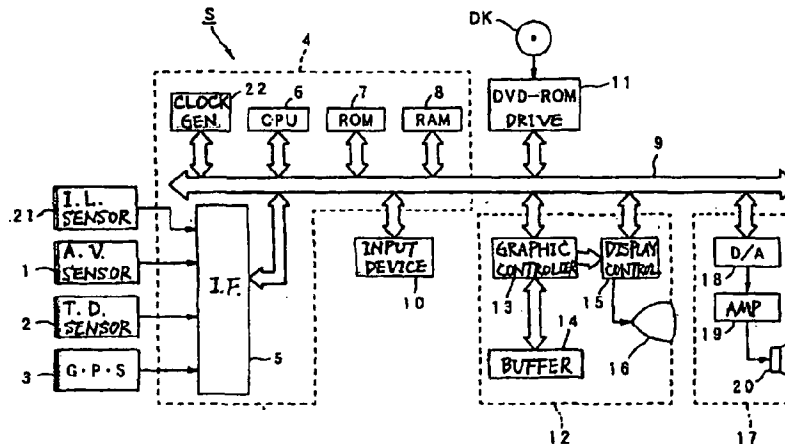

*Fig. 1*

**EP 0 959 462 A2**

**Description**

[0001] This Application claims the benefit of Japanese Application No. 10-140723 filed on May 22, 1998, which is hereby incorporated by reference.

**FIELD OF THE INVENTION**

[0002] The present invention relates to a recording medium for storing navigation information used to guide routes for a vehicle and to an information reproducing apparatus or drive for reading the navigation information from the recording medium. More particularly, the invention relates to a recording medium having a plurality of recording layers for storing navigation information and to an apparatus or drive for reading the navigation information from this recording medium.

**DESCRIPTION OF THE RELATED ART**

[0003] In recent years, many vehicles have been fitted with a navigation system that displays a map containing the current position of the vehicle. Often, the amount of navigation information stored in the system, containing map information corresponding to the map for navigation processing is exorbitant. However, since an in-vehicle navigation system is installed in a vehicle, the navigation system needs to be as small as possible.

[0004] Accordingly, navigation systems are now available that use a DVD disc, which has a storage capacity 7 times greater than a compact disc (CD), to store the navigation information necessary for navigation processing. This system is designed so that the navigation information is read from the DVD disc as the need arises.

[0005] DVD discs that have a plurality of recording layers (e.g., two recording layers) to store an increased amount of information are known. However, when navigation information is recorded at random on such DVD discs, it takes an excessively long time to play back the navigation information. In order to shift the focal position of a light beam in the system from one recording layer to another, a series of operations are necessary, including opening the focus servo loop, searching for the focal position, pulling-in the focus servo, and closing the focus servo loop. Therefore, if navigation information is recorded randomly across a plurality of recording layers, the focal point must frequently shift across the plurality of recording layers. This makes it impossible to read desired navigation information with sufficient speed.

[0006] Even when the focal point of the optical beam is shifted within one recording layer to read navigation information, a series of operations is necessary, including opening the tracking servo loop, searching for the focal position, pulling-in the tracking servo, and closing the tracking servo loop. Therefore, if the necessary navigation information is stored at random on this single recording layer, the focal point within this recording layer shifts frequently, rendering it impossible to play back desired navigation information in a short time.

**SUMMARY OF THE INVENTION**

[0007] The present invention is directed to a recording medium that substantially obviates one or more of the problems due to limitation and disadvantages of the related art.

[0008] An object of the present invention is to provide a recording medium and an information reproducing apparatus capable of quickly reading necessary navigation information.

[0009] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0010] To achieve these and other advantages and in accordance with the purpose of the invention, as embodied and broadly described, a recording medium of the present invention has a plurality of recording layers, on each of which a plurality of navigation information is recorded, wherein navigation information having a same attribute is recorded in a same one of the plurality of recording layers.

[0011] In another aspect, a recording medium has a plurality of recording layers in which there are a plurality of areas and on each of which navigation information is recorded, wherein navigation information having a same attribute is recorded in the same area of each of the plurality of recording layers.

[0012] In a further aspect, an information reproducing apparatus for reproducing information from a recording medium having a plurality of recording layers, on each of which navigation information is recorded, wherein navigation information having a same attribute is recorded in the same one of the plurality of recording layers, and the apparatus comprises means for emitting a light beam for reading the navigation information from the recording medium, focus control means for controlling the position of the light beam in a focus direction, tracking control means for controlling the position of the light beam in a tracking direction, and reproduction means for reproducing the navigation information on the basis of the reflected light beam from each of the recording layers of the recording medium.

[0013] In a still further aspect, an information reproducing apparatus for reproducing information from a recording medium having a plurality of recording layers in which there a plurality of areas and on each of which navigation information is recorded, wherein navigation information having a same attribute is recorded in a same area of each of the plurality of recording layers, and the apparatus comprises means for emitting a light beam for reading the navigation information from the recording medium, focus control means for controlling the position of the light beam in a focus direction, tracking control means for controlling the position of the light beam in a tracking direction, and reproduction means for reproducing the navigation information on the basis of the reflected light beam from each of the recording layers of the recording medium.

[0014] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0015] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

Fig. 1 is a block diagram schematically showing the structure of an in-vehicle navigation system in accordance with an embodiment of the present invention;

Fig. 2 is a block diagram of a DVD-ROM drive incorporated in the navigation system shown in Fig. 1; and

Fig. 3 is a diagram illustrating a data structure in each of the recording layers of a DVD disc in accordance with an embodiment of the present invention.

#### **DETAILED DESCRIPTION OF THE INVENTION**

[0016] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0017] A preferred embodiment of the invention relates to a DVD disc read by an in-vehicle navigation system, which assists a driver. The DVD disc acts as a recording medium in which map data and other data are stored. The structure and operation of the in-vehicle navigation system in accordance with the present invention are first described by referring to Fig. 1.

[0018] In Fig. 1, the in-vehicle navigation system S comprises an angular velocity sensor 1, a traveled distance sensor 2, a GPS receiver 3, an illumination lamp sensor 21, a system controller 4, an input device 10 such as a remote controller for entering various kinds of data, a DVD-ROM drive (also known as a DVD-ROM player) 11, a display unit 12 for displaying various kinds of data under control of the system controller 4, and a sound reproduction unit 17 for playing back various sound and voice data under control of the system controller 4.

[0019] The angular velocity sensor 1 detects the angular velocity of the vehicle when it makes a turn, and produces data about the angular velocity and the relative azimuth. The traveled distance sensor 2 counts the number of pulses in pulse signals produced as the vehicle wheels rotate and thus calculates the number of pulses per revolution of each vehicle wheel. The sensor 2 produces data about the distance traveled, based on the number of pulses per revolution. The GPS (Global Positioning System) receiver 3 receives radio waves from GPS satellites and produces GPS data. In addition, the GPS receiver 3 produces data about the absolute direction of movement of the vehicle. The system controller 4 controls the whole navigation system according to the data about the relative azimuth, the angular velocity, and the traveled distance, as well as GPS data used for determination of locations and data about the absolute azimuth. The illumination lamp sensor 21 detects whether an illumination lamp such as an illumination of an in-vehicle instrument (e.g., a speedometer) is lit up. The DVD-ROM drive 11 reads various kinds of data, such as road data including the number of lanes and road widths, and also reads a control program for execution of navigation processing from the DVD disc DK, under control of the system controller 4.

[0020] The system controller 4 comprises an interface 5 for connection with an external sensor such as the GPS receiver 3, a CPU 6 for controlling the whole system controller 4, a ROM (read-only memory) 7 loaded with a fundamental control program for controlling the system controller 4, a RAM (random access memory) 8 having a nonvolatile memory (not shown), and a clock generator 22 for measuring the present time based on the time data derived from the GPS satellites and received by the GPS receiver. The RAM 8 is loaded with various kinds of data, such as data about a route previously established by the user via the input device 10, such that the data can be read out. The input device 10, the DVD-ROM drive 11, the display unit 12, and the sound reproduction unit 17 are connected via a bus line 9.

[0021] The display unit 12 comprises a graphic controller 13, a buffer storage 14, and a display control portion 15 for

controlling display provided on a display unit 16, such as a liquid-crystal panel or CRT, according to image data produced from the graphic controller 13. This graphic controller 13 controls the whole display unit 12 according to control data sent from the CPU 6 via the bus line 9. The buffer storage 14 consists of a VRAM (video RAM) or the like and temporarily holds image information that can be immediately displayed.

**[0022]** The sound reproduction unit 17 comprises a digital-to-analog converter 18 for converting digital audio data sent from the DVD-ROM drive 11 or the RAM 8 via the bus line 9 into an analog signal, an amplifier 19 for amplifying the analog audio signal from the D/A converter 18, and a loudspeaker 20 for converting the amplified analog audio signal into an audible sound.

**[0023]** Next, the structure and operation of the DVD-ROM drive 11, which reads data recorded on the DVD-ROM disc DK, are described in detail by referring to Fig. 2. As shown in Fig. 2, the DVD-ROM drive 11 comprises a spindle motor 25, a pickup 26, an amplifier 27, a reproduction portion 28 serving as a reproduction means, a servo control portion 29 acting as a focus control means and a tracking control means, and a CPU 30.

**[0024]** The pickup 26 comprises an objective lens 40, a pair of coils 41 mounted around the objective lens 40, a pair of magnets 42, a polarized beam splitter 43, a collimator lens 44, a semiconductor laser 45 acting as an illumination means, a multilens 46, and a detector 47.

**[0025]** The DVD disc DK in accordance with the present embodiment has two recording layers,  $DK_1$  and  $DK_2$ , and stores various kinds of navigation data in a data structure. The operation of each component of the DVD-ROM drive in corresponding navigation information is described below.

**[0026]** When navigation data is read from the DVD disc DK, the semiconductor laser 45 first emits a reading optical beam  $L_p$ . This beam  $L_p$  is collimated by the collimator lens 44, passes through the polarized beam splitter 43, and reaches the objective lens 40. The beam is then focused by the objective lens 40 and impinges as light beam B on either recording layer  $DK_1$  or  $DK_2$ .

**[0027]** The coil 41 mounted around the objective lens 40 is excited with a servo drive signal  $S_d$  (described later) and interacts with the magnet 42 to control the focal point of the light beam B in the direction of focus (i.e., to determine which of the recording layers is illuminated with the light beam B) and to control the focal point in the direction of tracking (i.e., to determine the illuminated position within the selected recording layer).

**[0028]** The plane of polarization of the light beam B is rotated by either recording layer and the light beam B is reflected. The reflected light  $L_r$  is then reflected by the polarized beam splitter 43 and received by the detector 47 via the multilens 46. The multilens 46 is provided for giving astigmatism to the reflected light  $L_r$  to generate a focus error signal  $S_f$  (described later).

**[0029]** Then, the received reflected light  $L_r$  is converted into an electrical signal  $S_a$  by the detector 47 and sent to the amplifier 27. The amplifier 27 separates an RE signal  $S_{rf}$  that is indicative of program stored in the DVD disc DK, tracking error signal  $S_t$  that is used for tracking servo control, and a focus error signal  $S_f$  that is used for focus servo control, from the output signal  $S_a$  from the detector 47. The RF signal  $S_{rf}$  is sent to the reproduction portion 28. The tracking error signal  $S_t$  and the focus error signal  $S_f$  are separately supplied to the servo control portion 29.

**[0030]** The reproduction portion 28 reproduces the information or program recorded in the DVD disc DK from the RF signal  $S_{rf}$ , based on the control signal  $S_{cp}$  from the CPU 30. The reproduction portion 28 then outputs a reproduction signal  $S_p$  to the bus line 9.

**[0031]** The servo control portion 29, which receives the tracking error signal  $S_t$  and the focus error signal  $S_f$ , drives the objective lens 40 in the direction of focus or in the direction of tracking according to the control signal  $S_{cs}$  from the CPU 30, the tracking error signal  $S_t$ , and the focus error signal  $S_f$ . The servo control portion 29 generates the drive signal  $S_d$  to carry out servo control for focusing or tracking, and supplies the drive signal  $S_d$  to the coil 41.

**[0032]** Thus, the objective lens 40 is driven parallel to the DVD disc DK (i.e., in the tracking direction) or vertical to the disc (i.e., in the focus direction), and the tracking servo control or focus servo control is carried out.

**[0033]** Concurrently, the servo control portion 29 creates a spindle drive signal  $S_{ds}$  according to the control signal  $S_{cs}$  from the CPU 30 to drive the spindle motor 25. The spindle drive signal  $S_{ds}$  is sent to the spindle motor 25. When navigation data is read from the DVD disc DK, the spindle motor 25 rotates the DVD disc DK in response to the spindle drive signal  $S_{ds}$ .

**[0034]** During the operation described above, the servo control portion 29 provides the aforementioned focus servo control to focus the light beam B onto the recording layer specified by the CPU 30. Furthermore, the servo control portion 29 carries out the tracking servo control to move the focus of the light beam B to the position of the recording layer where data to be read is recorded. That is, in each servo control, the servo control portion 29 shifts the focus of the light beam either in the direction of focus (where the focus is moved from one recording layer to another) or in the direction of tracking (where a shift is made within one recording layer).

**[0035]** A series of operations is necessary when the focus is moved in the direction of focus, including opening the focus servo loop, searching for the focal position, pulling-in the focus servo, and closing the focus servo loop. Also, when the focus is shifted in the direction of tracking, a series of operations is necessary, including opening the tracking servo loop, searching for the focal position, pulling-in the tracking servo, and closing the tracking servo loop.

[0036] The data structure of the recording layers in accordance with the present invention is described next by referring to Fig. 3. In Fig. 3, data about a map at a smaller scale that covers a wider area is recorded on the recording layer DK<sub>1</sub>, while data about a detailed map at a greater scale that covers a narrow area (e.g., a urban map) is recorded on the recording layer DK<sub>2</sub>.

[0037] For example, with respect to the map data recorded on the recording layers, the whole country of Japan is divided into map meshes having a given area (e.g., 1-kilometer square). Each individual map mesh is recorded on the recording layers.

[0038] As shown in Fig. 3, first-layer data 50 recorded on the recording layer DK<sub>1</sub> contains map data management data 51, map mesh 1 data 53, map mesh 1 management data 52, map mesh 2 data 55, map mesh 2 management data 54, map mesh 3 management data 57,..., map mesh n data 59 and map mesh n management data 58. The map data management data 51 is management information about the whole map data recorded on the recording layer DK<sub>1</sub>. The map mesh 1 data 53 is data corresponding to an area indicated by the first map mesh. The map mesh 1 management data 52 is management information about the map mesh 1 data 53. The map mesh 2 data 55 is data corresponding to an area indicated by the second map mesh. The map mesh 2 management data 54 is management data about the map mesh 2 data 55. The map mesh 3 management data 57 is a management data about a map mesh 3 data (not shown) corresponding to an area indicated by the third map mesh. The map mesh n data 59 is data corresponding to an area indicated by the nth map mesh. The map mesh n management data 58 is management information about the map mesh n data 59.

[0039] The map mesh 1 indicated by the data 53, the map mesh 2 indicated by the data 55,..., and the map mesh n indicated by the data 59, all of which are recorded on the recording layer DK<sub>1</sub>, are drawn at the same scale.

[0040] Second-layer data 60 recorded on the recording layer DK<sub>2</sub> contains map mesh 1 urban map data 62, map mesh 1 urban map management data 61, map mesh 2 urban map data 65, map mesh 2 urban map management data 64, map mesh 3 urban map management data 66,..., map mesh n urban map data 68, and map mesh n urban map management data 67. The map mesh 1 urban map data 62 is data about a magnified urban map corresponding to the first map mesh described above. The map mesh 1 urban map management data 61 is management information about the map mesh 1 urban map data 62. The map mesh 2 urban map data 65 is data about a magnified urban map corresponding to an area indicated by the second map mesh. The map mesh 2 urban map management data 64 is management data about the map mesh 2 urban map data 65. The map mesh 3 urban map management data 66 is management information about the map mesh 3 urban map data. The map mesh 3 urban map (not shown) is a magnified map corresponding to an area indicated by the third map mesh. The map mesh n urban map data 68 is data about a magnified urban map corresponding to an area indicated by the nth map mesh. The map mesh n urban map management data 67 is management information about the map nth mesh urban map data 68.

[0041] The map mesh 1 urban map data 62, the map mesh 2 urban map data 65,..., and the map mesh n urban map data 68, all of which are recorded on the recording layer DK<sub>2</sub>, are drawn at a common scale, which is greater than the scale of the map indicated by the map mesh 1 data 53.

[0042] With respect to the physical positions (addresses) of the data on the recording layers, addresses of management data about each of the map meshes are common to both recording layers DK<sub>1</sub> and DK<sub>2</sub>.

[0043] That is, a start address A of the map mesh 1 management data 52 on the recording layer DK<sub>1</sub> is the same as a start address A of the map mesh 1 urban map management data 61 on the recording layer DK<sub>2</sub>. A start address C of the map mesh 2 management data 54 on the recording layer DK<sub>1</sub> is the same as a start address C of the map mesh 2 urban map management data 64 on the recording layer DK<sub>2</sub>. A start address F of the map mesh 3 management data 57 on the recording layer DK<sub>1</sub> is the same as a start address F of the map mesh 3 urban map management data 66 on the recording layer DK<sub>2</sub>. A start address H of the map mesh n management data 58 on the recording layer DK<sub>1</sub> is the same as a start address H of the map mesh n urban map management data 67 on the recording layer DK<sub>2</sub>.

[0044] To bring the start addresses of the management data into agreement with each other, boundary data 56 and 63, which are dummy data, are inserted into the corresponding positions within the first-layer data 50 and the second-layer data 60.

[0045] As described thus far, maps at the same scale are all recorded on each of the recording layers DK<sub>1</sub> and DK<sub>2</sub> of the DVD disc DK in accordance with the present embodiment. Therefore, when data about the maps at the same scale are read out, it is not necessary to shift the illuminated position of the light beam B across plural recording layers. Hence, the map data can be quickly read out.

[0046] Maps corresponding to the same mesh and drawn at different scales are recorded in the same regions of the overlapping recording layers DK<sub>1</sub> and DK<sub>2</sub>. Therefore, when maps belonging to the same mesh and drawn at different scales are read in succession, it is not necessary to shift the illuminated position of the light beam B within the same recording layer. The maps can be reproduced in succession simply by switching the illuminated position in focus direction. Thus, maps can be reproduced quickly.

[0047] In the embodiment described above, maps drawn at the same scale are all recorded on the same recording layer and maps belonging to the same mesh but drawn at different scales are recorded in the same region of the plural

recording layers. Data can be recorded with combinations as given in Table 1 below.

Table 1

Recording layer DK <sub>1</sub>	Recording layer DK <sub>2</sub>
data on maps of Eastern Japan	data on maps of Western Japan
data for search for route	data for search for locations
map data & map-related voice data	other voice data
data for operations on commands	data for voice-recognition operations
data for youngsters	data for the elderly
data for males	data for females
data for high-quality- oriented persons	data for low-cost-oriented persons
data for families	data for couples
map data	data for search for route & data for search for locations
map data	voice data
map data & voice data for route guidance	voice data for voice-recognition operation

**[0048]** In each example described in Table 1, data having the same attribute is recorded on the same recording layer.

**[0049]** In the first example, data about maps of Eastern Japan are all recorded in the first region of the recording layer DK<sub>1</sub>, and data about maps of Western Japan are all recorded in the second region of the recording layer DK<sub>2</sub>. With this configuration, data about maps to be read almost successively are all recorded on the same recording layer and so it is not necessary to switch the focal point from the recording layer DK<sub>1</sub> to DK<sub>2</sub>, for example, during playback. Consequently, the maps can be reproduced quickly.

**[0050]** In the second example, data used for search for routes, i.e., for setting an optimum route to a destination, can all be recorded on the recording layer DK<sub>1</sub>. Data used for search for locations, e.g., names, addresses and categories thereof, can all be recorded on the recording layer DK<sub>2</sub>. With this configuration, search data can be quickly played back by suppressing the number of switches of the focal point between the recording layers during playback, as it is unlikely that maps are searched for desired locations while searching for routes.

**[0051]** In the third example, map data and voice data associated with the map data can all be recorded on the recording layer DK<sub>1</sub>. Voice data independent of maps can all be recorded on the recording layer DK<sub>2</sub>. With this configuration, when navigation processing is performed using voice, voice data used during display of maps are present on the same recording layer as map data about the maps. Therefore, it is not necessary to shift the focal point between the recording layers when associated voice data are reproduced while displaying the maps. Hence, voice data can be reproduced quickly.

**[0052]** Furthermore, in the fourth example, data about commands for operations can all be recorded on the recording layer DK<sub>1</sub> while data about voice recognition can all be recorded on the recording layer DK<sub>2</sub>. When navigation processing is performed using voice and voice recognition operation, operations based on other commands are not usually carried out. Therefore, in this configuration, the number of switches of the focal point between the recording layers is restricted during playback, and data about the operations can be quickly reproduced.

**[0053]** In the fifth example, data about locations adapted for youngsters, such as amusement arcades, can all be recorded on the recording layer DK<sub>1</sub>. Data adapted for the elderly, e.g., data about vaudeville theaters, Shinto shrines, and Buddhist temples, can be recorded on the recording layer DK<sub>2</sub> in an easily understandable form. With this configuration, the number of switches of the focal point between the recording layers during playback is limited, because it is unlikely that data used for both youngsters and elderly are employed at the same time. Hence, their respective data can be quickly reproduced.

**[0054]** In the sixth example, data about locations generally favored by males, such as pinball saloons, baseball grounds, horse race tracks, etc., can all be recorded on the recording layer DK<sub>1</sub>, and data about locations generally favored by females, such as museums, theaters, etc., can all be recorded on the recording layer DK<sub>2</sub>. With this configuration, the number of switches of the focal point between the recording layers during playback is limited, because it is unlikely that data used for both males and females are employed at the same time. Hence, their respective data can be quickly reproduced.

**[0055]** In the seventh example, data adapted for persons favoring high-quality restaurants and big-name brand prod-

uct shops can all be recorded on the recording layer DK<sub>1</sub>, and data adapted for persons favoring economical shops and restaurants can all be recorded on the recording layer DK<sub>2</sub>. With this configuration, two kinds of data adapted for those favoring high-quality products and those favoring inexpensive products, respectively, are rarely used at the same time. Therefore, the number of switches of the focal point between the recording layers during playback is limited. Consequently, their respective data can be quickly reproduced.

[0056] In the eighth example, data adapted for families such as data about amusement parks, and recreation grounds are all recorded on the recording layer DK<sub>1</sub>, and data adapted for couples such as data about favorite destinations for dating couples can all be recorded on the recording layer DK<sub>2</sub>. With this structure, the number of switches of the focal point between the recording layers during playback is limited, because these two kinds of data are rarely used simultaneously. Consequently, their respective data can be quickly reproduced.

[0057] In the ninth example, map data can all be recorded on the recording layer DK<sub>1</sub>, and data used for route searches and data used for location searches can all be recorded on the recording layer DK<sub>2</sub>. With this structure, the number of switches of the focal point between the recording layers during playback is limited, because these two kinds of data are rarely used simultaneously. Consequently, their respective data can be quickly reproduced.

[0058] In the tenth example, map data can all be recorded on the recording layer DK<sub>1</sub>, and voice data can all be recorded on the recording layer DK<sub>2</sub>. With this structure, the number of switches of the focal point between the recording layers during playback is limited, because voice data is not frequently used when no route guidance is carried out. Consequently, their respective data can be quickly reproduced.

[0059] Finally, in the eleventh example, map data and voice data for route guidance can all be recorded on the recording layer DK<sub>1</sub>, and voice data for voice-recognition operation can all be recorded on the recording layer DK<sub>2</sub>. With this structure, the number of switches of the focal point between the recording layers during playback is limited, because these two kinds of data are rarely used simultaneously. Consequently, their respective data can be quickly reproduced.

[0060] As a matter of course, this invention is not limited to the above mentioned embodiment and examples described in Table 1. For instance, any combination of each example can arbitrarily be made.

[0061] As described above, according to the present invention, navigation information having a same attribute is recorded in one of the plurality of recording layers. Therefore, desired navigation information can be reproduced quickly.

[0062] It will be apparent to those skilled in the art that various modification and variations can be made in the recording medium and the information reproducing apparatus of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modification and variations of this invention provided they come within the scope of the appended claims and their equivalents.

## Claims

1. A recording medium having a plurality of recording layers, on each of which a plurality of navigation information is recorded, wherein navigation information having a same attribute is recorded in a same one of the plurality of recording layers.
2. The recording medium according to claim 1, wherein the plurality of navigation information includes first map data corresponding to a first area and second map data corresponding to a second area that is different from the first area, and wherein the first map data is recorded on one of the recording layers, and the second map data is recorded on another one of the plurality of recording layers.
3. The recording medium according to claim 1, wherein the plurality of navigation information includes map data corresponding to a plurality of scales, and wherein the map data having a same scale is recorded on the same one of the plurality of recording layers.
4. The recording medium according to claim 1, wherein the plurality of navigation information includes route search data and location search data, and wherein the route search data is recorded on one of the plurality of recording layers and the location search data is recorded on another one of the plurality of recording layers.
5. The recording medium according to claim 1, wherein the plurality of navigation information includes map data, voice data associated with the map data, and voice data independent of map data, and wherein the map data and the voice data associated with the map data are recorded on one of the plurality of recording layers and the voice data independent of the map data is recorded on another one of the plurality of recording layers.

6. The recording medium according to claim 1, wherein the plurality of navigation information includes map data and voice data, and wherein the map data is recorded on one of the plurality of recording layers and the voice data is recorded on another one of the plurality of recording layers.
7. A recording medium having a plurality of recording layers, in which there are a plurality of areas and on each of which navigation information is recorded, wherein navigation information having a same attribute is recorded in a same area of each of the plurality of recording layers.
8. The recording medium according to claim 7, wherein the navigation information includes first map data corresponding to an area at a first scale and second map data corresponding to the area at a second scale that is different from the first scale, and wherein the first map data and the second map data are recorded on one of the recording layers and another one of the recording layers respectively in the same area.
9. An information reproducing apparatus for reproducing information from a recording medium having a plurality of recording layers, on each of which navigation information is recorded, wherein navigation information having a same attribute is recorded in a same one of the plurality of recording layers, the apparatus comprising:
  - means for emitting a light beam for reading the navigation information from the recording medium;
  - focus control means for controlling a position of the light beam in a focus direction;
  - tracking control means for controlling the position of the light beam in a tracking direction; and
  - reproduction means for reproducing the navigation information on the basis of a reflected light beam from each of the recording layers of the recording medium.
10. The apparatus according to claim 9, wherein the navigation information includes first map data corresponding to a first area and second map data corresponding to a second area that is different from the first area, and wherein the first map data is recorded on one of the recording layers, and the second map data is recorded on another one of the plurality of recording layers.
11. The apparatus according to claim 9, wherein the navigation information includes map data corresponding to a plurality of scales, and wherein map data having a same scale is recorded on the same one of the plurality of recording layers.
12. The apparatus according to claim 9, wherein the navigation information includes route search data and location search data, and wherein the route search data is recorded on one of the plurality of recording layers and the location search data is recorded on another one of the plurality of recording layers.
13. The apparatus according to claim 9, wherein the navigation information includes map data, voice data associated with the map data, and voice data independent of map data, and wherein the map data and the voice data associated with the map data are recorded on one of the plurality of recording layers and the voice data independent of the map data is recorded on another one of the plurality of recording layers.
14. The apparatus according to claim 9, wherein the navigation information includes map data and voice data, and wherein the map data is recorded on one of the plurality of recording layers and the voice data is recorded on another one of the plurality of recording layers.
15. An information reproducing apparatus for reproducing information from a recording medium having a plurality of recording layers, in which there are a plurality of areas and on each of which navigation information is recorded, wherein navigation information having a same attribute is recorded in a same area of each of the plurality of recording layers, the apparatus comprising:



means for emitting a light beam for reading the navigation information from the recording medium;

focus control means for controlling a position of the light beam in a focus direction;

5 tracking control means for controlling the position of the light beam in a tracking direction; and

reproduction means for reproducing the navigation information on the basis of a reflected light beam from each of the recording layers of the recording medium.

10 **16.** The apparatus according to claim 15, wherein the navigation information includes first map data corresponding to an area at a first scale and second map data corresponding to the area at a second scale that is different from the first scale, and  
wherein the first map data and the second map data are recorded on one of the recording layers and another one  
of the recording layers, respectively, in the same area.

15

20

25

30

35

40

45

50

55

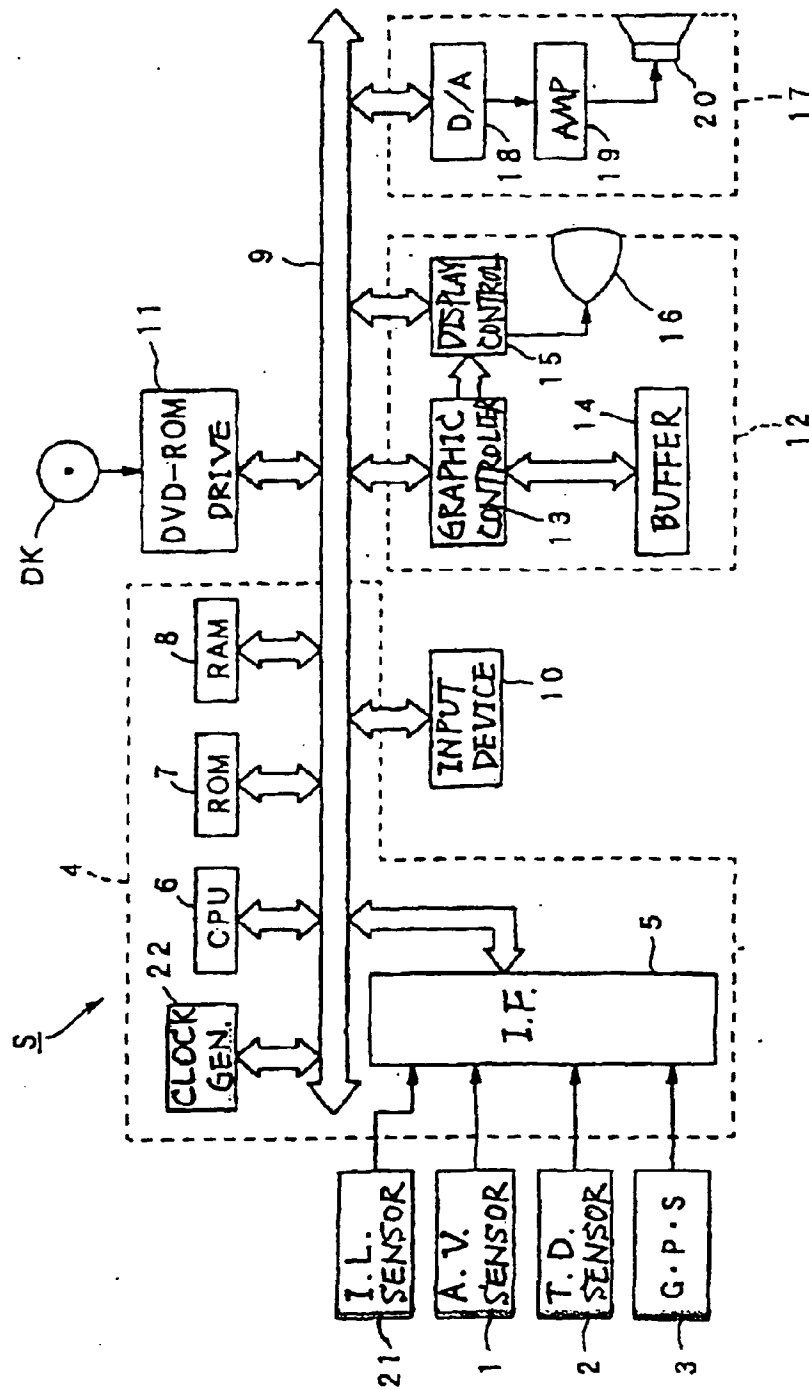
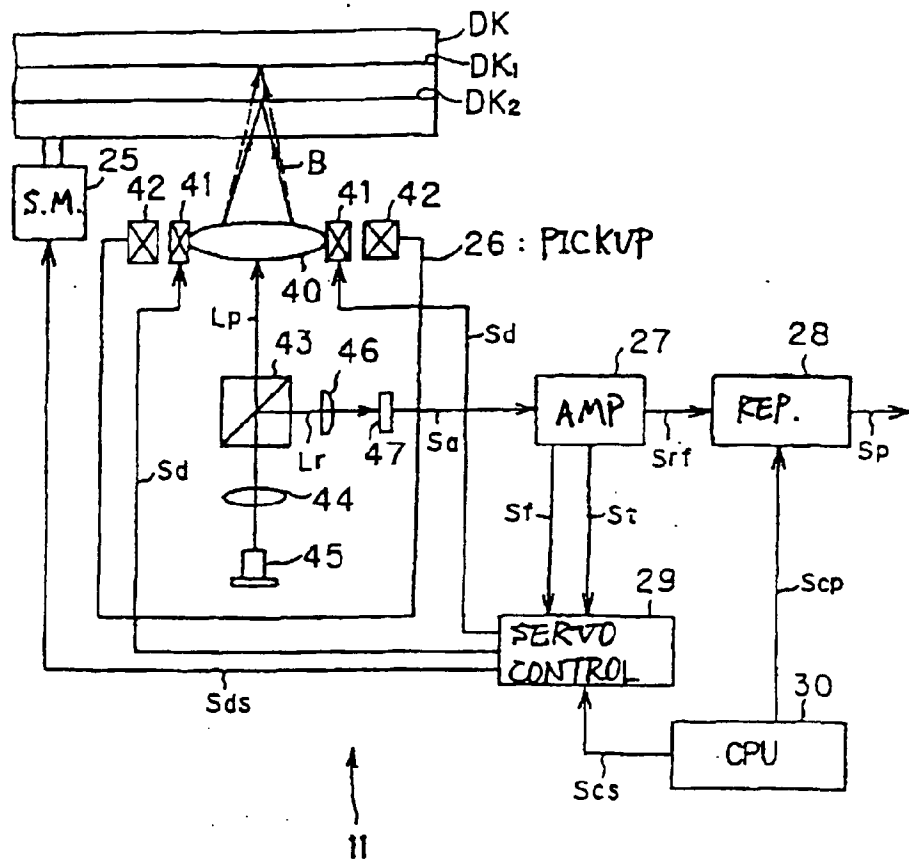


Fig. 1




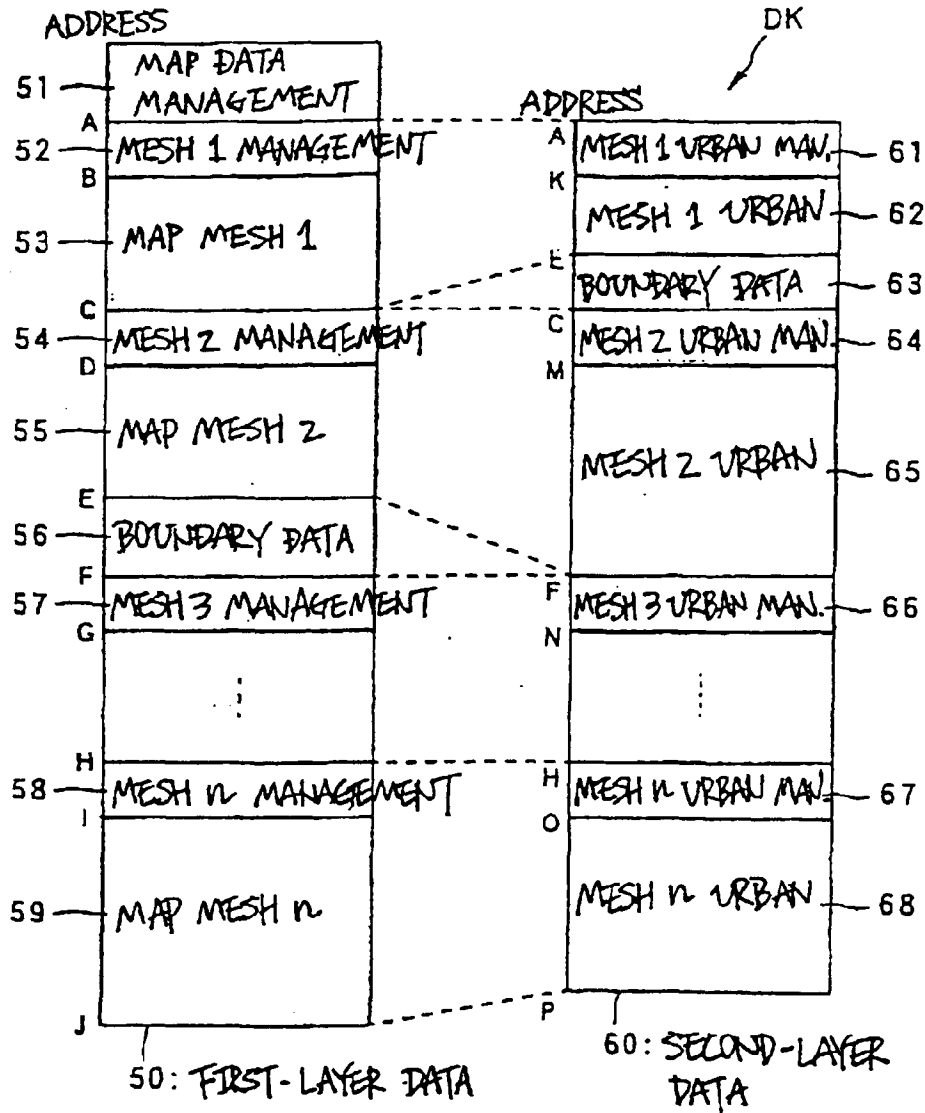


Fig. 3



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 959 462 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
15.03.2000 Bulletin 2000/11

(51) Int. Cl.<sup>7</sup>: G11B 7/00, G11B 7/24,  
G11B 7/26, G11B 7/007,  
G11B 20/12

(43) Date of publication A2:  
24.11.1999 Bulletin 1999/47

(21) Application number: 99109224.8

(22) Date of filing: 21.05.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Katsuyoshi, Hayashi,  
Pioneer Electronic Corp  
Kawagoe-shi, Saitama (JP)  
• Kenichiro, Yano,  
Pioneer Electronic Corp  
Kawagoe-shi, Saitama (JP)

(30) Priority: 22.05.1998 JP 14072398

(71) Applicant:  
PIONEER ELECTRONIC CORPORATION  
Meguro-ku, Tokyo (JP)

(74) Representative:  
Klingseisen, Franz, Dipl.-Ing. et al  
Patentanwälte,  
Dr. F. Zumstein,  
Dipl.-Ing. F. Klingseisen,  
Postfach 10 15 61  
80089 München (DE)

(54) Recording medium on which navigation information is recorded and information reproducing apparatus therefor

(57) A recording medium and an information reproducing apparatus capable of quickly reading navigation information are offered. The recording medium has a plurality of recording layers, on each of which navigation

information is recorded. Navigation information having a same attribute is recorded in same one of the plurality of recording layers.

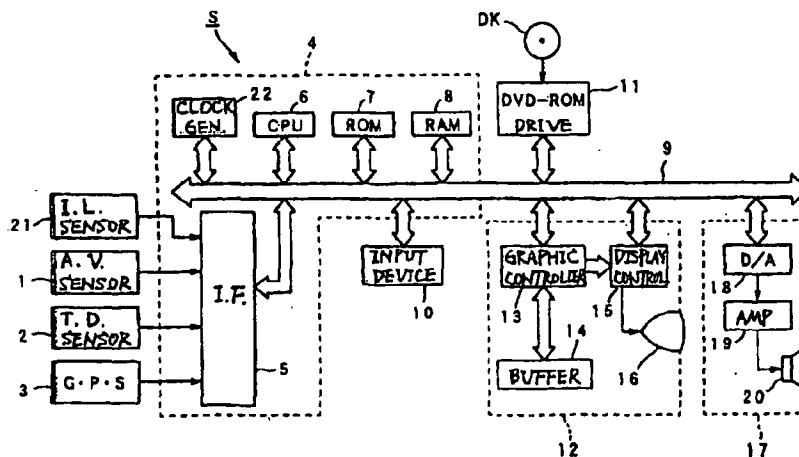


Fig. 1

EP 0 959 462 A3

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 99109224.8

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 6)
A, P	PATENT ABSTRACTS OF JAPAN, vol. 99, no. 3, 31 March 1999; & JP 10 340538 A (MATSUSHITA ELECTRIC IND CO LTD), 22 December 1998, abstract. --	1	G11B7/00 G11B7/24 G11B7/26 G11B7/007 G11B20/12
A, P	PATENT ABSTRACTS OF JAPAN, vol. 98, no. 12, 30 November 1998; & JP 10 227653 A (ALPINE ELECTRON INC) 25 August 1998, abstract. --	1-16	
A	PATENT ABSTRACTS OF JAPAN, vol. 98, no. 2, 30 January 1998; & JP 09 257500 A (MATSUSHITA ELECTRIC IND CO LTD), 03 October 1997, abstract. ----	1-16	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 6)
			G11B
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 01-12-1999	Examiner BERGER
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>I : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.92 (1/9001)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO. EP 99109224.8

This annex lists the patent family members relating to the patent documents cited in the above-mentioned search report.  
The members are as contained in the EPIDOS INPADOC file on 2.12.1999.  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP A2 10340538	22-12-1998	none	
JP A2 10227653	25-08-1998	none	
JP A2 9257500	03-10-1997	none	

For more details about this annex see Official Journal of the European Patent Office, No. 12/32.